

DEPARTMENT OF THE ARMY
Omaha District, Corps of Engineers
106 South 15th Street
Omaha, Nebraska 68102-1618

:NOTICE: Failure to acknowledge : Solicitation No. DACA45-02-B-0009
:all amendments may cause rejec- :
:tion of the bid. See FAR : Date of Issue: 05 JUNE 2002
:52.214-3 of Section 00100 : **Date of Opening: 15 JULY 2002**

Amendment No. 0004
08 July 2002

SUBJECT: **Amendment No. 0004** to Specifications and Drawings for Construction of
LIVE ORDNANCE LOADING AREA (LOLA), ELLSWORTH AFB, SD
Solicitation No. DACA45-02-B-0009

TO: Prospective Bidders and Others Concerned

1. The specifications and drawings for subject project are hereby modified as follows (revise all specification indices, attachment lists, and drawing indices accordingly).

Correction to Am_0003, On Item No. 19 of Amendment No. 3, the Note added to (MG-2) on Sheet S1.02 indicates in the note to reference "Sheet S2.01/Section 1"; it should reference "Sheet S2.02/Section 1."

a. Specifications (New and/or Revised and Reissued). Delete and substitute specification sections as noted below. The substituted sections are revised and reissued with this amendment.

Sections Deleted	Sections Substituted
-----	Section 13110A

b. Drawings (Not Reissued). The following drawings of drawing code AF116-90-06 are revised as indicated below with latest revision date of 08 July 2002. These drawings are not reissued with this amendment.

1. **Drawing S2.01,**

- a) Roof plan, at drawing coordinate 2A, delete reference to Section "B/S2.01/A5.01" and substitute "3/S2.01/A3.01".
- b) Roof plan, at drawing coordinate 2D, delete reference to Section "A/S2.01/A3.01" and substitute "1/S2.01/A3.01".
- c) Roof plan, at drawing coordinate 2E, delete reference to Section "B/S2.01/A3.01" and substitute "2/S2.01/A3.01".

c. Drawings (New). The following new drawings of drawing code AF116-90-06 are hereby added with a 7/08/2002 date to the contract drawings and are issued with this amendment.

<u>SHEET</u>	<u>NUMBER</u>	<u>SHEET TITLE</u>
	SU.01	BLAST DEFLECTORS, ANCHOR BOLT LAYOUT PLAN
	SU.02	BLAST DEFLECTOR ELEV AND SECTIONS & FUEL PIT SECTIONS

2. This amendment is a part of the bidding papers and its receipt shall be acknowledged on the Standard Form 1442. All other conditions and requirements of the specifications remain unchanged. If the bids have been mailed prior to receiving this amendment, you will notify the office where bids are opened, in the specified manner, immediately of its receipt and of any changes in your bid occasioned thereby.

a. Hand-Carried Bids shall be delivered to the U.S. Army Corps of Engineers, Omaha District, Contracting Division (Room 301), 106 South 15th Street, Omaha, Nebraska 68102-1618.

b. Mailed Bids shall be addressed as noted in Item 8 on Page 00010-1 of Standard Form 1442.

3. **Bids will be received until 2:00 p.m., local time at place of bid opening, 15 JULY 2002.**

Attachments

Section in 1.b. above
Dwgs. in 1.c. above

U.S. Army Engineer District, Omaha
Corps of Engineers
106 South 15th Street
Omaha, Nebraska 68102-1618

08 July 2002
mrp/4413

SECTION TABLE OF CONTENTS

DIVISION 13 - SPECIAL CONSTRUCTION

SECTION 13110A

CATHODIC PROTECTION SYSTEM (SACRIFICIAL ANODE)

11/98

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SUBMITTALS
- 1.3 GENERAL REQUIREMENTS
 - 1.3.1 Services of "Corrosion Expert"
 - 1.3.2 Contractor's Modifications
 - 1.3.3 Isolators
 - 1.3.4 Anode and Bond Wires
 - 1.3.5 Surge Protection
 - 1.3.6 Summary of Services Required
 - 1.3.7 Nonmetallic Pipe System
 - 1.3.7.1 Coatings
 - 1.3.7.2 Tracer Wire
 - 1.3.8 Tests of Components
 - 1.3.9 Drawings
 - 1.3.10 Electrical Potential Measurements
 - 1.3.11 Achievement of Criteria for Protection
 - 1.3.12 Metallic Components and Typicals
 - 1.3.13 Metallic Component Coating

PART 2 PRODUCTS

- 2.1 MAGNESIUM ANODES
 - 2.1.1 Anode Composition
 - 2.1.2 Dimensions and Weights
 - 2.1.3 Packaged Anodes
 - 2.1.4 Zinc Anodes
 - 2.1.5 Connecting Wire
 - 2.1.5.1 Wire Requirements
 - 2.1.5.2 Anode Header Cable
- 2.2 MISCELLANEOUS MATERIALS
 - 2.2.1 Electrical Wire
 - 2.2.1.1 Wire Splicing
 - 2.2.1.2 Test Wires
 - 2.2.1.3 Resistance Wire
 - 2.2.2 Conduit
 - 2.2.3 Test Boxes and Junctions Boxes
 - 2.2.4 Joint, Patch, Seal, and Repair Coating
 - 2.2.5 Backfill Shields
 - 2.2.6 Epoxy Potting Compound
 - 2.2.7 Test Stations
 - 2.2.8 Joint and Continuity Bonds
 - 2.2.9 Resistance Bonds
 - 2.2.10 Stray Current Measurements
 - 2.2.11 Electrical Isolation of Structures

- 2.2.11.1 Electrically Isolating Pipe Joints
- 2.2.11.2 Electrically Conductive Couplings
- 2.2.11.3 Insulating Joint Testing
- 2.2.12 Underground Structure Coating
 - 2.2.12.1 Field Joints
 - 2.2.12.2 Inspection of Pipe Coatings
- 2.2.13 Resistance Wire
- 2.2.14 Electrical Connections
- 2.2.15 Electrical Tape
- 2.2.16 Permanent Reference Electrodes
- 2.2.17 Casing

PART 3 EXECUTION

- 3.1 CRITERIA OF PROTECTION
 - 3.1.1 Iron and Steel
 - 3.1.2 Aluminum
 - 3.1.3 Copper Piping
- 3.2 ANODE STORAGE AND INSTALLATION
 - 3.2.1 Anode Storage
 - 3.2.2 Anode Installation
 - 3.2.2.1 Single Anodes
 - 3.2.2.2 Welding Methods
 - 3.2.3 Anode Placement - General
 - 3.2.4 Underground Pipeline
 - 3.2.5 Installation Details
 - 3.2.6 Lead Wire Connections
 - 3.2.6.1 Underground Pipeline (Metallic)
 - 3.2.6.2 Resistance Wire Splices
 - 3.2.7 Location of Test Stations
 - 3.2.8 Underground Pipe Joint Bonds
- 3.3 ELECTRICAL ISOLATION OF STRUCTURES
 - 3.3.1 Isolation Joints and Fittings
 - 3.3.2 Gas Distribution Piping
- 3.4 TRENCHING AND BACKFILLING
- 3.5 TESTS AND MEASUREMENTS
 - 3.5.1 Baseline Potentials
 - 3.5.2 Isolation Testing
 - 3.5.2.1 Insulation Checker
 - 3.5.2.2 Cathodic Protection Meter
 - 3.5.3 Anode Output
 - 3.5.4 Reference Electrode Potential Measurements
 - 3.5.5 Location of Measurements
 - 3.5.5.1 Piping or Conduit
 - 3.5.5.2 Casing Tests
 - 3.5.5.3 Interference Testing
 - 3.5.5.4 Holiday Test
 - 3.5.5.5 Recording Measurements
- 3.6 TRAINING COURSE
- 3.7 CLEANUP
- 3.8 MISCELLANEOUS INSTALLATION AND TESTING
 - 3.8.1 Coatings
 - 3.8.2 Excavation
- 3.9 SPARE PARTS
- 3.10 SEEDING
- 3.11 SYSTEM TESTING
- 3.12 CLEARING OF TREES AND UNDERBRUSH

-- End of Section Table of Contents --

SECTION 13110A

CATHODIC PROTECTION SYSTEM (SACRIFICIAL ANODE)
11/98

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- | | |
|-------------|---|
| ASTM B 418 | (1995a) Cast and Wrought Galvanic Zinc Anodes |
| ASTM B 843 | (1993; R 1998) Magnesium Alloy Anodes for Cathodic Protection |
| ASTM D 1248 | (1998) Polyethylene Plastics Molding and Extrusion Materials |

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

- | | |
|------------|--|
| 40 CFR 280 | Technical Standards and Corrective Action Requirements for Owners and Operators of Underground Storage Tanks (UST) |
| 49 CFR 192 | Transportation of Natural and other Gas by Pipeline: Minimum Federal Safety Standards |
| 49 CFR 195 | Transportation of Hazardous Liquids by Pipeline |

NACE INTERNATIONAL (NACE)

- | | |
|-------------|--|
| NACE RP0169 | (1996) Control of External Corrosion on Underground or Submerged Metallic Piping Systems |
| NACE RP0177 | (1995) Mitigation of Alternating Current and Lightning Effects on Metallic Structures and Corrosion Control Systems |
| NACE RP0188 | (1999) Discontinuity (Holiday) Testing of Protective Coatings |
| NACE RP0190 | (1995) External Protective Coatings for Joints, Fittings, and Valves on Metallic Underground or Submerged Pipelines and Piping Systems |
| NACE RP0193 | (1993) External Cathodic Protection of |

On-Grade Metallic Storage Tank Bottoms

NACE RP0285 (1995) Corrosion Control of Underground Storage Tank Systems by Cathodic Protection

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA TC 2 (1998) Electrical Polyvinyl Chloride (PVC) Tubing (EPT) and Conduit (EPC-40 and EPC-80)

NEMA WC 5 (1992; Rev 2, 1996) Thermoplastic-Insulated Wire and Cable for the Transmission and Distribution of Electrical Energy

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

UNDERWRITERS LABORATORIES (UL)

UL 6 (1997) Rigid Metal Conduit

UL 510 (1994; Rev thru Apr 1998) Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape

UL 514A (1996; Rev Dec 1999) Metallic Outlet Boxes

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Drawings; G, RE

Six copies of detail drawings consisting of a complete list of equipment and material including manufacturer's descriptive and technical literature, catalog cuts, results of system design calculations including soil-resistivity, installation instructions and certified test data stating the maximum recommended anode current output density and the rate of gaseous production if any at that current density. Detail drawings shall contain complete wiring and schematic diagrams and any other details required to demonstrate that the system has been coordinated and will function properly as a unit.

Contractor's Modifications; G, RE

Six copies of detail drawings showing proposed changes in location, scope of performance indicating any variations from, additions to, or clarifications of contract drawings. The drawings shall show proposed changes in anode arrangement, anode

size and number, anode materials and layout details, conduit size, wire size, mounting details, wiring diagram, method for electrically-isolating each pipe, and any other pertinent information to proper installation and performance of the system.

SD-03 Product Data

Equipment; G, RE

Within 30 days after receipt of notice to proceed, an itemized list of equipment and materials including item number, quantity, and manufacturer of each item. The list shall be accompanied by a description of procedures for each type of testing and adjustments, including testing of coating for thickness and holidays. Installation of materials and equipment shall not commence until this submittal is approved.

Spare Parts; G, RE

Spare parts data for each different item of material and equipment specified, after approval of detail drawings and not later than six (6) months prior to the date of beneficial occupancy. The data shall include a complete list of parts, special tools, and supplies, with current unit prices and source of supply. One (1) spare anode of each type shall be furnished.

SD-06 Test Reports

Tests and Measurements; G, RE

Test reports in booklet form tabulating all field tests and measurements performed, upon completion and testing of the installed system and including close interval potential survey, casing and interference tests, final system test verifying protection, insulated joint and bond tests, and holiday coating test. A certified test report showing that the connecting method has passed a 120-day laboratory test without failure at the place of connection, wherein the anode is subjected to maximum recommended current output while immersed in a three percent sodium chloride solution.

Contractor's Modifications; G, RE

Final report regarding Contractor's modifications. The report shall include pipe-to-soil measurements throughout the affected area, indicating that the modifications improved the overall conditions, and current measurements for anodes. The following special materials and information are required: taping materials and conductors; zinc grounding cell, installation and testing procedures, and equipment; coating material; system design calculations for anode number, life, and parameters to achieve protective potential; backfill shield material and installation details showing waterproofing; bonding and waterproofing details; insulated resistance wire; exothermic weld equipment and material.

SD-07 Certificates

Cathodic Protection System; G, RE

Proof that the materials and equipment furnished under this section conform to the specified requirements contained in the referenced standards or publications. The label or listing by the specified agency will be acceptable evidence of such compliance.

Services of "Corrosion Expert"; G, RE

Evidence of qualifications of the "corrosion expert."

a. The "corrosion expert's" name and qualifications shall be certified in writing to the Contracting Officer prior to the start of construction.

b. Certification shall be submitted giving the name of the firm, the number of years of experience, and a list of not less than five (5) of the firm's installations three (3) or more years old that have been tested and found satisfactory.

SD-10 Operation and Maintenance Data

Cathodic Protection System; G, RE

Before final acceptance of the cathodic protection system, six copies of operating manuals outlining the step-by-step procedures required for system startup, operation, adjustment of current flow, and shutdown. The manuals shall include the manufacturer's name, model number, service manual, parts list, and brief description of all equipment and their basic operating features. Six copies of maintenance manual, listing routine maintenance procedures, recommendation for maintenance testing, possible breakdowns and repairs, and troubleshooting guides. The manuals shall include single-line diagrams for the system as installed; instructions in making pipe-to-reference cell and tank-to-reference cell potential measurements and frequency of monitoring; instructions for dielectric connections, interference and sacrificial anode bonds; instructions shall include precautions to ensure safe conditions during repair of pipe or other metallic systems. The instructions shall be neatly bound between permanent covers and titled "Operating and Maintenance Instructions." These instructions shall be submitted for the Contracting Officer's approval. The instructions shall include the following:

a. As-built drawings, to scale of the entire system, showing the locations of the piping, location of all anodes and test stations, locations of all insulating joints, and structure-to-reference cell potentials as measured during the tests required by Paragraph: TESTS AND MEASUREMENTS, of this section.

b. Recommendations for maintenance testing, including instructions in making pipe-to-reference cell potential measurements and frequency of testing.

c. All maintenance and operating instructions and nameplate data shall be in English.

d. Instructions shall include precautions to insure safe conditions during repair of pipe system.

Training Course; G, RE

The proposed Training Course Curriculum (including topics and dates of discussion) indicating that all of the items contained in the operating and maintenance instructions, as well as demonstrations of routine maintenance operations, including testing procedures included in the maintenance instructions, are to be covered.

1.3 GENERAL REQUIREMENTS

The Contractor shall furnish and install a complete, operating, sacrificial anode cathodic protection system in complete compliance with NFPA 70, with all applicable Federal, State, and local regulations and with minimum requirements of this contract. The services required include planning, installation, adjusting and testing of a cathodic protection system, using sacrificial anodes for cathodic protection of the Water, and Gas lines, their connectors and lines under the slab or floor foundation. The cathodic protection system shall include anodes, cables, connectors, corrosion protection test stations, and any other equipment required for a complete operating system providing the NACE criteria of protection as specified. Insulators are required whenever needed to insulate the pipes from any other structure. The cathodic protection shall be provided on Water, and Gas pipes.

1.3.1 Services of "Corrosion Expert"

The Contractor shall obtain the services of a "corrosion expert" to supervise, inspect, and test the installation and performance of the cathodic protection system. "Corrosion expert" refers to a person, who by thorough knowledge of the physical sciences and the principles of engineering and mathematics, acquired by professional education and related practical experience, is qualified to engage in the practice of corrosion control of buried or submerged metallic surfaces. Such a person must be accredited or certified by the National Association of Corrosion Engineers (NACE) as a NACE Accredited Corrosion Specialist or a NACE certified Cathodic Protection (CP) Specialist or be a registered professional engineer who has certification or licensing that includes education and experience in corrosion control of buried or submerged metallic piping and tank systems, if such certification or licensing includes 5 years experience in corrosion control on underground metallic surfaces of the type under this contract. The "corrosion expert" shall make at least 3 visits to the project site. The first of these visits shall include obtaining soil resistivity data, acknowledging the type of pipeline coatings to be used and reporting to the Contractor the type of cathodic protection required. Once the submittals are approved and the materials delivered, the "corrosion expert" shall revisit the site to ensure the Contractor understands installation practices and laying out the components. The third visit shall involve testing the installed cathodic protection systems and training applicable personnel on proper maintenance techniques. The "corrosion expert" shall supervise installation and testing of all cathodic protection.

1.3.2 Contractor's Modifications

The specified system is based on a complete system with magnesium sacrificial anodes. The Contractor may modify the cathodic protection system after review of the project, site verification, and analysis, if the

proposed modifications include the anodes specified and will provide better overall system performance. The modifications shall be fully described, shall be approved by the Contracting Officer's representative, and shall meet the following criteria. The proposed system shall achieve a minimum pipe-to-soil "instant off" potential of minus 850 millivolts with reference to a saturated copper-copper sulfate reference cell on the underground components of the piping or other metallic surface. The Contractor shall take resistivity measurements of the soil in the vicinity of the pipes and ground bed sites. Based upon the measurements taken, the current and voltage shall be required to produce a minimum of minus 850 millivolts "instant off" potential between the structure being tested and the reference cell. This potential shall be obtained over 95 percent of the metallic area. The anode system shall be designed for a life of twenty-five (25) years of continuous operation.

1.3.3 Isolators

Isolators are required to insulate the indicated pipes from any other structure. Isolators shall be provided with lightning protection and a test station as shown.

1.3.4 Anode and Bond Wires

A minimum of 5 magnesium anodes with an unpackaged weight of 9 pounds shall be provided uniform distances along the metallic pipe lines. A minimum of 3 test stations shall be used for these anodes. These anodes shall be in addition to anodes for the pipe under concrete slab and casing requirements. For each cathodic system, the metallic components and structures to be protected shall be made electrically continuous. This shall be accomplished by installing bond wires between the various structures. Bonding of existing buried structures may also be required to preclude detrimental stray current effects and safety hazards. Provisions shall be included to return stray current to its source without damaging structures intercepting the stray current. The electrical isolation of underground facilities in accordance with acceptable industry practice shall be included under this section. All tests shall be witnessed by the Contracting Officer.

1.3.5 Surge Protection

Approved zinc grounding cells or sealed weatherproof lightning arrestor devices shall be installed across insulated flanges or fittings installed in underground piping as indicated on the drawings. The arrestor shall be gapless, self-healing, solid state type. Zinc anode composition shall conform to ASTM B 418, Type II. Lead wires shall be number 6 AWG copper with high molecular weight polyethylene (HMWPE) insulation. The zinc grounding cells shall not be prepackaged in backfill but shall be installed as detailed on the drawings. Lightning arrestors or zinc grounding cells are not required for insulated flanges on metallic components used on nonmetallic piping systems.

1.3.6 Summary of Services Required

The scope of services shall include, but shall not be limited to, the following:

- a. Close-interval potential surveys.
- b. Cathodic Protection Systems.

- c. System testing.
- d. Casing corrosion control.
- e. Interference testing.
- f. Training.
- g. Operating and maintenance manual.
- h. Insulator testing and bonding testing.
- i. Coating and holiday testing shall be submitted within 45 days of notice to proceed.

1.3.7 Nonmetallic Pipe System

In the event pipe other than metallic pipe is approved and used in lieu of metallic pipe, all metallic components of this pipe system shall be protected with cathodic protection. Detailed drawings of cathodic protection for each component shall be submitted to the Contracting Officer for approval within 45 days after date of receipt of notice to proceed, and before commencement of any work.

1.3.7.1 Coatings

Coatings for metallic components shall be as required for metallic fittings. Protective covering (coating and taping) shall be completed and tested on each metallic component (such as valves, hydrants and fittings). This covering shall be as required for underground metallic pipe. Each test shall be witnessed by the Contracting Officer. Coatings shall be selected, applied, and inspected in accordance with NACE RP0190 and as specified in these specifications. The use of nonmetallic pipe does not change other requirements of the specifications. Any deviations due to the use of nonmetallic pipe shall be submitted for approval.

1.3.7.2 Tracer Wire

When a nonmetallic pipe line is used to extend or add to an existing metallic line, an insulated No. 8 AWG copper wire shall be thermit-welded to the existing metallic line and run the length of the new nonmetallic line. This wire shall be used as a locator tracer wire and to maintain continuity to any future extensions of the pipe line.

1.3.8 Tests of Components

A minimum of four (4) tests shall be made at each metallic component in the piping system. Two (2) measurements shall be made directly over the anodes and the other two (2) tests shall be over the outer edge of the component, but at the farthest point from the anodes. Structure and pipes shall be shown with the cathodic protection equipment. All components of the cathodic protection system shall be shown on drawings, showing their relationship to the protected structure or component. A narrative shall describe how the cathodic protection system will work and provide testing at each component. Components requiring cathodic protection shall include but not be limited to the following:

- a. Pipes under the floor slab or foundations.

- b. PIV.
- c. Shutoff valves.
- d. Metallic pipe extended from aboveground locations.
- e. Each connector or change-of-direction device.
- f. Any metallic pipe component or section.
- g. Backflow preventor.
- h. Culvert.

1.3.9 Drawings

Detailed drawings shall be provided showing location of anodes, insulated fittings, test stations, permanent reference cells, and bonding. Locations shall be referenced to two (2) permanent facilities or mark points.

1.3.10 Electrical Potential Measurements

All potential tests shall be made at a minimum of 3 meter intervals witnessed by the Contracting Officer. Submittals shall identify test locations on separate drawing, showing all metal to be protected and all cathodic protection equipment. Test points equipment and protected metal shall be easily distinguished and identified.

1.3.11 Achievement of Criteria for Protection

All conductors, unless otherwise shown, shall be routed to or through the test stations. Each system provided shall achieve a minimum pipe-to-soil "instant off" potential of minus 850 millivolt potentials with reference to a saturated copper-copper-sulfate reference cell on all underground components of the piping. Based upon the measurements taken, the current and voltage of the anodes should be adjusted as required to produce a minimum of minus 850 millivolts "instant off" potential between the structure being tested and the reference cell. This potential should be obtained over 95 percent of the metallic area. This must be achieved without the "instant off" potential exceeding 1150 millivolts. Testing will be witnessed by the Contracting Officer. Additional anodes shall be provided by the Contractor if required to achieve the minus 850 millivolts "instant off". Although acceptance criteria of the cathodic protection systems are defined in NACE RP0169, for this project the "instant off" potential of minus 850 millivolts is the only acceptable criteria.

1.3.12 Metallic Components and Typical

a. Metallic components: As a minimum, each metallic component shall be protected with two (2) magnesium anodes. This number of anodes is required to achieve minus 850 millivolts "instant off" potential on the metallic area and at the same time not provide overvoltage above 1150 millivolts "instant off." As a minimum, the magnesium anode unpackaged weight shall be . The magnesium anodes shall be located on each side of the metallic component and routed through a test station.

b. Fire Hydrants: Fire hydrant pipe components shall have a minimum of two (2) anodes. These magnesium anodes shall have an unpackaged

weight of 7.7 kilograms (17 lbs).

c. Pipe Under Concrete Slab: Pipe under concrete slab shall have a minimum of 2 magnesium anodes. These magnesium anodes shall have an unpackaged weight of . Pipe under concrete slab shall have 1 permanent reference electrodes located under the slab. One (1) permanent reference electrode shall be located where the pipe enters the concrete slab. All conductors shall be routed to a test station.

d. Valves: Each valve shall be protected with 1 magnesium anodes. The magnesium anode shall have an unpackaged weight of .

e. Metallic Pipe Component or Section: Each section of metallic pipe shall be protected with 2 magnesium anodes. The magnesium anodes shall have an unpackaged weight of .

f. Connectors or Change-of-Direction Devices: Each change-of-direction device shall be protected with 2 magnesium anodes. The magnesium anode shall have an unpackaged weight of .

1.3.13 Metallic Component Coating

Coatings for metallic components shall be as required for metallic fittings as indicated. This will include fire hydrants, T's, elbows, valves, etc. Coatings shall be selected, applied, and inspected in accordance with NACE RP0190 and as specified in these specifications.

PART 2 PRODUCTS

2.1 MAGNESIUM ANODES

A minimum of 10 anodes shall be installed on the Pipe system. See Paragraph METALLIC COMPONENTS AND TYPICALS for additional anodes under slab.

2.1.1 Anode Composition

Anodes shall be of high-potential magnesium alloy, made of primary magnesium obtained from sea water or brine, and not made from scrap metal. Magnesium anodes shall conform to ASTM B 843 and to the following analysis (in percents) otherwise indicated:

Aluminum, max.	0.010
Manganese, max.	0.50 to 1.30
Zinc	0.05
Silicon, max.	0.05
Copper, max.	0.02
Nickel, max.	0.001
Iron, Max.	0.03
Other impurities, max.	0.05 each or 0.3 max. total
Magnesium	Remainder

The Contractor shall furnish spectrographic analysis on samples from each heat or batch of anodes used on this project.

2.1.2 Dimensions and Weights

Dimensions and weights of anodes shall be approximately as follows:

TYPICAL MAGNESIUM ANODE SIZE

(Cross sections may be round, square, or D shaped)

NOMINAL WT. kg.	APPROX. SIZE (mm)	NOMINAL GROSS WT kg PACKAGED IN BACKFILL	NOMINAL PACKAGE DIMENSIONS (mm)
1.4	76 X 76 X 127	3.6	133 X 133 X 203
2.3	76 X 76 X 203	5.9	133 X 133 X 286
4.1	76 X 76 X 356	12.3	133 X 508
5.5	102 X 102 X 305	14.5	191 X 457
7.7	102 X 102 X 432	20.5	191 X 610
14.5	127 X 127 X 521	30.9	216 X 711
22.7	178 X 178 X 406	45.5	254 X 610

2.1.3 Packaged Anodes

Anodes shall be provided in packaged form with the anode surrounded by specially-prepared quick-wetting backfill and contained in a water permeable cloth or paper sack. Anodes shall be centered by means of spacers in the backfill material. The backfill material shall have the following composition, unless otherwise indicated:

Material	Approximate Percent by Weight
Gypsum	75
Bentonite	20
Sodium Sulphate	5
Total	100

2.1.4 Zinc Anodes

Zinc anodes shall conform to ASTM B 418, Type II.

2.1.5 Connecting Wire

2.1.5.1 Wire Requirements

Wire shall be No. 12 AWG solid copper wire, not less than 3 meters long, unspliced, complying with NFPA 70, Type RHH insulation. Connecting wires for magnesium anodes shall be factory installed with the place or emergence from the anode in a cavity sealed flush with a dielectric sealing compound. Connecting wires for zinc anodes shall be factory installed with the place of connection to the protruding steel core completely sealed with a dielectric material.

2.1.5.2 Anode Header Cable

Cable for anode header and distribution shall be No. 12 AWG stranded copper wire with type CP high molecular weight polyethylene, 2.8 mm thick insulation, 600-volt rating, in accordance with NEMA WC 5.

2.2 MISCELLANEOUS MATERIALS

2.2.1 Electrical Wire

Wire shall be No. 12 AWG stranded copper wire with NFPA 70, Type RHW-USE insulation. Polyethylene insulation shall comply with the requirements of ASTM D 1248 and shall be of the following types, classes, and grades:

High-molecular weight polyethylene shall be Type I, Class C, Grade E5.

High-density polyethylene shall be Type III, Class C, Grade E3.

2.2.1.1 Wire Splicing

Connecting wire splicing shall be made with copper compression connectors or exothermic welds, following instructions of the manufacturer. Single split-bolt connections shall not be used. Sheaths for encapsulating electrical wire splices to be buried underground shall fit the insulated wires entering the spliced joints and epoxy potting compound shall be as specified below.

2.2.1.2 Test Wires

Test wires shall be AWG No. 12 stranded copper wire with NFPA 70, Type TW or RHW or polyethylene insulation.

2.2.1.3 Resistance Wire

Resistance wire shall be AWG No. 16 or No. 22 nickel-chromium wire.

2.2.2 Conduit

Rigid galvanized steel conduit and accessories shall conform to UL 6. Non metallic conduit shall conform to NEMA TC 2.

2.2.3 Test Boxes and Junctions Boxes

Boxes shall be outdoor type conforming to UL 514A.

2.2.4 Joint, Patch, Seal, and Repair Coating

Sealing and dielectric compound shall be a black, rubber based compound that is soft, permanently pliable, tacky, moldable, and unbacked. Compound shall be applied as recommended by the manufacturer, but not less than 13 mm thick. Coating compound shall be cold-applied coal-tar base mastic. Pressure-sensitive vinyl plastic electrical tape shall conform to UL 510.

2.2.5 Backfill Shields

Shields shall consist of approved pipeline wrapping or fiberglass-reinforced, coal-tar impregnated tape, or plastic weld caps, specifically made for the purpose and installed in accordance with the manufacturer's recommendations. When joint bonds are required, due to the use of mechanical joints, the entire joint shall be protected by the use of a kraft paper joint cover. The joint cover shall be filled with poured-in, hot coat-tar enamel.

2.2.6 Epoxy Potting Compound

Compound for encapsulating electrical wire splices to be buried underground shall be a two package system made for the purpose.

2.2.7 Test Stations

Stations shall be of the flush-curb-box type and shall be the standard product of a recognized manufacturer. Test stations shall be complete with an insulated terminal block having the required number of terminals. The test station shall be provided with a lockable over and shall have an embossed legend, "C.P. Test." A minimum of one (1) test station shall be provided each component of the pipe. A minimum of six (6) terminals shall be provided in each test station. A minimum of two (2) leads are required to the metallic pipe from each test station. Other conductors shall be provided for each anode, other foreign pipe, and reference cells as required. Test stations may be constructed of nonmetallic materials. However, if nonmetallic materials are utilized, as a minimum, the materials shall be resistant to damage from ultraviolet radiation, contain good color retention qualities, contain high strength qualities, and be resistant to accidental or vandalistic impacts that might be normally encountered in the environment for which they are to be installed. The test stations shall be listed for the particular application for which they are to be utilized.

2.2.8 Joint and Continuity Bonds

Bonds shall be provided across all joints in the metallic water and gas lines, across any electrically discontinuous connections and all other pipes and structures with other than welded or threaded joints that are included in this cathodic protection system. Unless otherwise specified in the specifications, bonds between structures and across joints in pipe with other than welded or threaded joints shall be No. 8 AWG stranded copper cable with polyethylene insulation. Bonds between structures shall contain sufficient slack for any anticipated movement between structures. Bonds across pipe joints shall contain a minimum of 102 mm of slack to allow for pipe movement and soil stress. Bonds shall be attached by exothermic welding. Exothermic weld areas shall be insulated with coating compound and approved, and witnessed by the Contracting Officer. Continuity bonds shall be installed as necessary to reduce stray current interference. Additional joint bondings shall be accomplished by the Contractor where the necessity is discovered during construction or testing or where the Contracting Officer's representative directs that such bonding be done. Joint bonding shall include all associated excavation and backfilling. There shall be a minimum of two (2) continuity bonds between each structure and other than welded or threaded joints. The Contractor shall test for electrical continuity across all joints with other than welded or threaded joints and across all metallic portions or components. The Contractor shall provide bonding as required and as specified above until electrical continuity is achieved. Bonding test data shall be submitted for approval.

2.2.9 Resistance Bonds

Resistance bonds should be adjusted as outlined in this specification. Alternate methods may be used if they are approved by the Contracting Officer.

2.2.10 Stray Current Measurements

Stray current measurements should be performed at each test station. Stray currents resulting from lightning or overhead alternating current (AC) power transmission systems shall be mitigated in accordance with NACE RP0177.

2.2.11 Electrical Isolation of Structures

As a minimum, isolating flanges or unions shall be provided at the following locations:

- a. Connection of new metallic piping or components to existing piping.
- b. Pressure piping under floor slab to a building.

Isolation shall be provided at metallic connection of all lines to existing system and where connecting to a building. Additionally, isolation shall be provided between water and/or gas line; and foreign pipes that cross the new lines within 3.05 m . Isolation fittings, including isolating flanges and couplings, shall be installed aboveground or in a concrete pit.

2.2.11.1 Electrically Isolating Pipe Joints

Electrically isolating pipe joints shall be of a type that is in regular factory production.

2.2.11.2 Electrically Conductive Couplings

Electrically conductive couplings shall be of a type that has a published maximum electrical resistance rating given in the manufacturer's literature. Cradles and seals shall be of a type that is in regular factory production made for the purpose of electrically insulating the carrier pipe from the casing and preventing the incursion of water into the annular space.

2.2.11.3 Insulating Joint Testing

A Model 601 Insulation Checker, as manufactured by "Gas Electronics", or an approved equal, shall be used for insulating joint (flange) electrical testing.

2.2.12 Underground Structure Coating

This coating specification shall take precedence over any other project specification and drawing notes, whether stated or implied, and shall also apply to the pipeline or tank supplier. No variance in coating quality shall be allowed by the Contractor or Base Construction Representative without the written consent of the designer. All underground metallic pipelines and tanks to be cathodically protected shall be afforded a good quality factory-applied coating. This includes all carbon steel, cast-iron and ductile-iron pipelines or vessels. Coatings shall be selected, applied, and inspected in accordance with NACE RP0190 and as specified. If non-metallic pipelines are installed, all metallic fittings on pipe sections shall be coated in accordance with this specification section.

- a. The nominal thickness of the metallic pipe joint or other component coating shall be , plus or minus 5 percent.
- b. Pipe and joint coating for factory applied or field repair material shall be applied as recommended by the manufacturer and shall be one of the following:
 - (1) Continuously extruded polyethylene and adhesive coating system.
 - (2) Polyvinyl chloride pressure-sensitive adhesive tape.
 - (3) High density polyethylene/bituminous rubber compound tape.

- (4) Butyl rubber tape.
- (5) Coal tar epoxy.

2.2.12.1 Field Joints

All field joints shall be coated with materials compatible with the pipeline coating compound. The joint coating material shall be applied to an equal thickness as the pipeline coating. Unbonded coatings shall not be used on these buried metallic components. This includes the elimination of all unbonded polymer wraps or tubes. Once the pipeline or vessel is set in the trench, an inspection of the coating shall be conducted. This inspection shall include electrical holiday detection. Any damaged areas of the coating shall be properly repaired. The Contracting Officer shall be asked to witness inspection of the coating and testing using a holiday detector.

2.2.12.2 Inspection of Pipe Coatings

Any damage to the protective covering during transit and handling shall be repaired before installation. After field coating and wrapping has been applied, the entire pipe shall be inspected by an electric holiday detector with impressed current in accordance with NACE RP0188 using a full-ring, spring-type coil electrode. The holiday detector shall be equipped with a bell, buzzer, or other type of audible signal which sounds when a holiday is detected. All holidays in the protective covering shall be repaired immediately upon detection. Occasional checks of holiday detector potential will be made by the Contracting Officer's representative to determine suitability of the detector. All labor, materials, and equipment necessary for conducting the inspection shall be furnished by the Contractor.

a. Protective covering for aboveground piping system: Finish painting shall conform to the applicable paragraph of SECTION: 09900, PAINTING, GENERAL, and as follows:

b. Ferrous surfaces: Shop-primed surfaces shall be touched-up with ferrous metal primer. Surfaces that have not been shop-primed shall be solvent-cleaned. Surfaces that contain loose rust, loose mil scale, and other foreign substances shall be mechanically-cleaned by power wire-brushing and primed with ferrous metal primer. Primed surface shall be finished with two (2) coats of exterior oil paint and vinyl paint. Coating for each entire piping service shall be an approved pipe line wrapping having a minimum coating resistance of 50,000 Ohms per 0.0929 square meters .

2.2.13 Resistance Wire

Wire shall be No. 16 or No. 22 nickel-chromium wire with TW insulation.

2.2.14 Electrical Connections

Electrical connections shall be done as follows:

a. Exothermic welds shall be "Cadweld", "Rurndy" "Thermoweld" or an approved equal. Use of this material shall be in strict accordance with the manufacturer's recommendations.

b. Electrical-shielded arc welds shall be approved for use on steel pipe by shop drawing submittal action.

c. Brazing shall be as specified in Paragraph: Lead Wire Connections.

2.2.15 Electrical Tape

Pressure-sensitive vinyl plastic electrical tape shall conform to UL 510.

2.2.16 Permanent Reference Electrodes

Permanent reference electrodes shall be Cu-CuSO₄ electrodes suitable for direct burial. Electrodes shall be guaranteed by the supplier for 15 years' service in the environment in which they shall be placed. Electrodes shall be installed directly beneath pipe, or metallic component.

2.2.17 Casing

Where a pipeline is installed in a casing under a roadway or railway, the pipeline shall be electrically insulated from the casing, and the annular space sealed and filled with an approved corrosion inhibiting product against incursion of water.

PART 3 EXECUTION

3.1 CRITERIA OF PROTECTION

Acceptance criteria for determining the adequacy of protection on a buried underground pipe or metallic component shall be in accordance with NACE RP0169 and as specified below.

3.1.1 Iron and Steel

The following method (a) shall be used for testing cathodic protection voltages. If more than one method is required, method (b) shall be used.

a. A negative voltage of at least minus 850 millivolts as measured between the underground component and a saturated copper-copper sulphate reference electrode connecting the earth (electrolyte) directly over the underground component. Determination of this voltage shall be made with the cathodic protection system in operation. Voltage drops shall be considered for valid interpretation of this voltage measurement. A minimum of minus 850 millivolts "instant off" potential between the underground component being tested and the reference cell shall be achieved over 95 percent of the area of the structure. Adequate number of measurements shall be obtained over the entire structure, pipe, tank, or other metallic component to verify and record achievement of minus 850 millivolts "instant off." This potential shall be obtained over 95 percent of the total metallic area without the "instant off" potential exceeding 1200 millivolts.

b. A minimum polarization voltage shift of 100 millivolts as measured between the underground component and a saturated copper-copper sulphate reference electrode contacting the earth directly over the underground component. This polarization voltage shift shall be determined by interrupting the protective current and measuring the polarization decay. When the protective current is interrupted, an immediate voltage shift will occur. The voltage reading, after the immediate shift, shall be used as the base reading from which to measure polarization decay. Measurements achieving 100 millivolts decay shall be made over 95 percent of the metallic surface being protected.

c. For any metallic component, a minimum of four (4) measurements shall be made using subparagraph (a), above, and achieving the "instant off" potential of minus 850 millivolts. Two (2) measurements shall be made over the anodes and two (2) measurements shall be made at different locations near the component and farthest away from the anode.

3.1.2 Aluminum

Aluminum underground component shall not be protected to a potential more negative than minus 1200 millivolts, measured between the underground component and a saturated copper-copper sulphate reference electrode contacting the earth, directly over the metallic component. Resistance, if required, shall be inserted in the anode circuit within the test station to reduce the potential of the aluminum to a value which will not exceed a potential more negative than minus 1200 millivolts. Voltage shift criterion shall be a minimum negative polarization shift of 100 millivolts measured between the metallic component and a saturated copper-copper sulphate reference electrode contacting the earth, directly over the metallic component. The polarization voltage shift shall be determined as outlined for iron and steel.

3.1.3 Copper Piping

For copper piping, the following criteria shall apply: A minimum of 100 millivolts of cathodic polarization between the structure surface and a stable reference electrode contacting the electrolyte. The polarization voltage shift shall be determined as outlined for iron and steel.

3.2 ANODE STORAGE AND INSTALLATION

3.2.1 Anode Storage

Storage area for magnesium anodes will be designated by the Contracting Officer. If anodes are not stored in a building, tarps or similar protection should be used to protect anodes from inclement weather. Packaged anodes, damaged as a result of improper handling or being exposed to rain, shall be resacked by the Contractor and the required backfill added.

3.2.2 Anode Installation

Unless otherwise authorized, installation shall not proceed without the presence of the Contracting Officer. Anodes of the size specified shall be installed to the depth indicated and at the locations shown. Locations may be changed to clear obstructions with the approval of the Contracting Officer. Anodes shall be installed in sufficient number and of the required type, size, and spacing to obtain a uniform current distribution over the surface of the structure. The anode system shall be designed for a life of 25 years of continuous operation. Anodes shall be installed as indicated in a dry condition after any plastic or waterproof protective covering has been completely removed from the water permeable, permanent container housing the anode metal. The anode connecting wire shall not be used for lowering the anode into the hole. The annular space around the anode shall be backfilled with fine earth in 150 mm layers and each layer shall be hand tamped. Care must be exercised not to strike the anode or connecting wire with the tamper. Approximately 20 liters of water shall be applied to each filled hole after anode backfilling and tamping has been completed to a point about 150 mm above the anode. After the water has

been absorbed by the earth, backfilling shall be completed to the ground surface level.

3.2.2.1 Single Anodes

Single anodes shall be connected through a test station to the pipeline, allowing adequate slack in the connecting wire to compensate for movement during backfill operation.

3.2.2.2 Welding Methods

Connections to ferrous pipe shall be made by exothermic weld methods manufactured for the type of pipe supplied. Electric arc welded connections and other types of welded connections to ferrous pipe and structures shall be approved before use.

3.2.3 Anode Placement - General

Packaged anodes shall be installed completely dry, and shall be lowered into holes by rope sling or by grasping the cloth gather. The anode lead wire shall not be used in lowering the anodes. The hole shall be backfilled with fine soil in 150 mm layers and each layer shall be hand-tamped around the anode. Care must be exercised not to strike the anode or lead wire with the tamper. If immediate testing is to be performed, water shall be added only after backfilling and tamping has been completed to a point 150 mm above the anode. Approximately 8 liters of water may be poured into the hole. After the water has been absorbed by the soil, backfilling and tamping may be completed to the top of the hole. Anodes shall be installed as specified or shown. In the event a rock strata is encountered prior to achieving specified augered-hole depth, anodes may be installed horizontally to a depth at least as deep as the bottom of the pipe, with the approval of the Contracting Officer.

3.2.4 Underground Pipeline

Anodes shall be installed at a minimum of 2.5 meters and a maximum of 3 meters from the line to be protected.

3.2.5 Installation Details

Details shall conform to the requirements of this specification. Details shown on the drawings are indicative of the general type of material required, and are not intended to restrict selection to material of any particular manufacturer.

3.2.6 Lead Wire Connections

3.2.6.1 Underground Pipeline (Metallic)

To facilitate periodic electrical measurements during the life of the sacrificial anode system and to reduce the output current of the anodes, if required, all anode lead wires shall be connected to a test station and buried a minimum of 610 mm in depth. The cable shall be No. 10 AWG, stranded copper, polyethylene or RHW-USE insulated cable. The cable shall make contact with the structure only through a test station. Resistance wire shall be installed between the cable and the pipe cable, in the test station, to reduce the current output, if required. Anode connections,

except in the test station, shall be made with exothermic welding process, and shall be insulated by means of at least three (3) layers of electrical tape; and all lead wire connections shall be installed in a moistureproof splice mold kit and filled with epoxy resin. Lead wire-to-structure connections shall be accomplished by an exothermic welding process. All welds shall be in accordance with the manufacturer's recommendations. A backfill shield filled with a pipeline mastic sealant or material compatible with the coating shall be placed over the weld connection and shall be of such diameter as to cover the exposed metal adequately.

3.2.6.2 Resistance Wire Splices

Resistance wire connections shall be accomplished with silver solder and the solder joints wrapped with a minimum of three (3) layers of pressure-sensitive tape. Lead wire connections shall be installed in a moistureproof splice mold kit and filled with epoxy resin.

3.2.7 Location of Test Stations

Test stations shall be of the type and location shown and shall be curb box mounted. Buried insulating joints shall be provided with test wire connections brought to a test station. Unless otherwise shown, other test stations shall be located as follows:

- a. At 300 m intervals or less.
- b. Where the pipe or conduit crosses any other metal pipe.
- c. At both ends of casings under roadways and railways.
- d. Where both sides of an insulating joint are not accessible above ground for testing purposes.

3.2.8 Underground Pipe Joint Bonds

Underground pipe having other than welded or threaded coupling joints shall be made electrically continuous by means of a bonding connection installed across the joint.

3.3 ELECTRICAL ISOLATION OF STRUCTURES

3.3.1 Isolation Joints and Fittings

Isolating fittings, including main line isolating flanges and couplings, shall be installed aboveground, or within manholes, wherever possible. Where isolating joints must be covered with soil, they shall be fitted with a paper joint cover specifically manufactured for covering the particular joint, and the space within the cover filled with hot coal-tar enamel. Isolating fittings in lines entering buildings shall be located at least 305 mm above grade of floor level, when possible. Isolating joints shall be provided with grounding cells to protect against over-voltage surges or approved surge protection devices. The cells shall provide a low resistance across isolating joint without excessive loss of cathodic current.

3.3.2 Gas Distribution Piping

Electrical isolation shall be provided at each building riser pipe to the pressure regulator, at all points where a short to another structure or to

a foreign structure may occur, and at other locations as indicated on the drawings.

3.4 TRENCHING AND BACKFILLING

Trenching and backfilling shall be in accordance with Section 02316 EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITY SYSTEMS.

3.5 TESTS AND MEASUREMENTS

3.5.1 Baseline Potentials

Each test and measurement will be witnessed by the Contracting Officer. The Contractor shall notify the Contracting Officer a minimum of five (5) working days prior to each test. After backfill of the pipe, the static potential-to-soil of the pipe shall be measured. The locations of these measurements shall be identical to the locations specified for pipe-to-reference electrode potential measurements. The initial measurements shall be recorded.

3.5.2 Isolation Testing

Before the anode system is connected to the pipe, an isolation test shall be made at each isolating joint or fitting. This test shall demonstrate that no metallic contact, or short circuit exists between the two isolated sections of the pipe. Any isolating fittings installed and found to be defective shall be reported to the Contracting Officer.

3.5.2.1 Insulation Checker

A Model 601 insulation checker, as manufactured by "Gas Electronics", or an approved equal, using the continuity check circuit, shall be used for isolating joint (flange) electrical testing. Testing shall conform to the manufacturer's operating instructions. Test shall be witnessed by the Contracting Officer. An isolating joint that is good will read full scale on the meter. If an isolating joint is shorted, the meter pointer will be deflected or near zero on the meter scale. Location of the fault shall be determined from the instructions, and the joint shall be repaired. If an isolating joint is located inside a vault, the pipe shall be sleeved with insulator when entering and leaving the vault.

3.5.2.2 Cathodic Protection Meter

A Model B3A2 cathodic protection meter, as manufactured by "M.C. Miller", or an approved equal, using the continuity check circuit, shall be used for isolating joint (flange) electrical testing. This test shall be performed in addition to the Model 601 insulation checker. Continuity is checked across the isolation joint after the test lead wire is shorted together and the meter adjusted to scale. A full-scale deflection indicates the system is shorted at some location. The Model 601 verifies that the particular insulation under test is good and the Model B3A2 verifies that the system is isolated. If the system is shorted, further testing shall be performed to isolate the location of the short.

3.5.3 Anode Output

As the anodes or groups of anodes are connected to the pipe, current output shall be measured with an approved clamp-on milliammeter, calibrated shunt with a suitable millivoltmeter or multimeter, or a low resistance ammeter.

(Of the three methods, the low-resistance ammeter is the least desirable and most inaccurate. The clamp-on milliammeter is the most accurate.) The valves obtained and the date, time, and location shall be recorded.

3.5.4 Reference Electrode Potential Measurements

Upon completion of the installation and with the entire cathodic protection system in operation, electrode potential measurements shall be made using a copper-copper sulphate reference electrode and a potentiometer-voltmeter, or a direct-current voltmeter having an internal resistance (sensitivity) of not less than 10 megohms per volt and a full scale of 10 volts. The locations of these measurements shall be identical to the locations used for baseline potentials. The values obtained and the date, time, and locations of measurements shall be recorded. No less than eight (8) measurements shall be made over any length of line or component. Additional measurements shall be made at each distribution service riser, with the reference electrode placed directly over the service line.

3.5.5 Location of Measurements

3.5.5.1 Piping or Conduit

For coated piping or conduit, measurements shall be taken from the reference electrode located in contact with the earth, directly over the pipe. Connection to the pipe shall be made at service risers, valves, test leads, or by other means suitable for test purposes. Pipe-to-soil potential measurements shall be made at intervals not exceeding . The Contractor may use a continuous pipe-to-soil potential profile in lieu of interval pipe-to-soil potential measurements. Additional measurements shall be made at each distribution service riser, with the reference electrode placed directly over the service line adjacent to the riser. Potentials shall be plotted versus distance to an approved scale. Locations where potentials do not meet or exceed the criteria shall be identified and reported to the Contracting Officer's representative.

3.5.5.2 Casing Tests

Before final acceptance of the installation, the electrical separation of carrier pipe from casings shall be tested and any short circuits corrected.

3.5.5.3 Interference Testing

Before final acceptance of the installation, interference tests shall be made with respect to any foreign pipes in cooperation with the owner of the foreign pipes. A full report of the tests giving all details shall be made. Stray current measurements shall be performed at all isolating locations and at locations where the new pipeline crosses foreign metallic pipes. The method of measurements and locations of measurements shall be submitted for approval. As a minimum, stray current measurements shall be performed at the following locations:

- a. Connection point of new pipeline to existing pipeline.
- b. Crossing points of new pipeline with existing lines.

Results of stray current measurements shall also be submitted for approval.

3.5.5.4 Holiday Test

Any damage to the protective covering during transit and handling shall be repaired before installation. After field-coating and wrapping has been applied, the entire pipe shall be inspected by an electric holiday detector with impressed current in accordance with NACE RP0188 using a full-ring, spring-type coil electrode. The holiday detector shall be equipped with a bell, buzzer, or other type of audible signal which sounds when a holiday is detected. Holidays in the protective covering shall be repaired upon detection. Occasional checks of holiday detector potential will be made by the Contracting Officer to determine suitability of the detector. Labor, materials, and equipment necessary for conducting the inspection shall be furnished by the Contractor. The coating system shall be inspected for holes, voids, cracks, and other damage during installation.

3.5.5.5 Recording Measurements

All pipe-to-soil potential measurements, including initial potentials where required, shall be recorded. The Contractor shall locate, correct and report to the Contracting Officer any short circuits to foreign pipes encountered during checkout of the installed cathodic protection system. Pipe-to-soil potential measurements shall be taken on as many pipes as necessary to determine the extent of protection or to locate short-circuits.

3.6 TRAINING COURSE

The Contractor shall conduct a training course for the operating staff as designated by the Contracting Officer. The training period shall consist of a total of 4 hours of normal working time and shall start after the system is functionally completed but prior to final acceptance tests. The field instructions shall cover all of the items contained in the operating and maintenance instructions, as well as demonstrations of routine maintenance operations, including testing procedures included in the maintenance instructions. At least 14 days prior to date of proposed conduction of the training course, the training course curriculum shall be submitted for approval, along with the proposed training date. Training shall consist of demonstration of test equipment, providing forms for test data and the tolerances which indicate that the system works.

3.7 CLEANUP

The Contractor shall be responsible for cleanup of the construction site. All paper bags, wire clippings, etc., shall be disposed of as directed. Paper bags, wire clippings and other waste shall not be put in bell holes or anodes excavation.

3.8 MISCELLANEOUS INSTALLATION AND TESTING

3.8.1 Coatings

All aboveground pipeline shall be coated as indicated or as approved. The coating shall have a minimum thickness of 0.18 mm . The pipeline coating shall be in accordance with all applicable Federal, State, and local regulations.

3.8.2 Excavation

In the event rock is encountered in providing the required depth for anodes, the Contractor shall determine an alternate approved location and, if the depth is still not provided, an alternate plan shall be submitted to the Contracting Officer. Alternate techniques and depths must be approved

prior to implementation.

3.9 SPARE PARTS

After approval of shop drawings, and not later than three (3) months prior to the date of beneficial occupancy, the Contractor shall furnish spare parts data for each different item of material and equipment specified. The data shall include a complete list of parts, special tools, and supplies, with current unit prices and source of supply. In addition, the Contractor shall supply information for material and equipment replacement for all other components of the complete system, including anodes, cables, splice kits and connectors, corrosion test stations, and any other components not listed above. The Contractor shall furnish a reference cell on a reel with of conductor, along with other accessories, and a digital voltmeter that can be used in the maintenance of this cathodic protection system. Use of this equipment shall be demonstrated in actual tests during the training course, which shall include a description of the the equipment and measurement of the pipe-to-soil potential, rainfall, and gas company voltages.

3.10 SEEDING

Seeding shall be done by the Contractor, as directed, in all unsurfaced locations disturbed by this construction. In areas where grass cover exists, it is possible that sod can be carefully removed, watered, and stored during construction operations, and replaced after the operations are completed since it is estimated that no section of pipeline should remain uncovered for more than two (2) days. The use of sod in lieu of seeding shall require approval by the Contracting Officer.

3.11 SYSTEM TESTING

The Contractor shall submit a report including potential measurements taken at adequately-close intervals to establish that minus 850 millivolts potential, "instant-off" potential, is provided, and that the cathodic protection is not providing interference to other foreign pipes causing damage to paint or pipes. The report shall provide a narrative describing how the criteria of protection is achieved without damaging other pipe or structures in the area.


3.12 CLEARING OF TREES AND UNDERBRUSH

In the areas of the anode beds, all trees and underbrush shall be cleared and grubbed to the limits shown or indicated.

-- End of Section --


A B C D E F G H

6
5
4
3
2
1

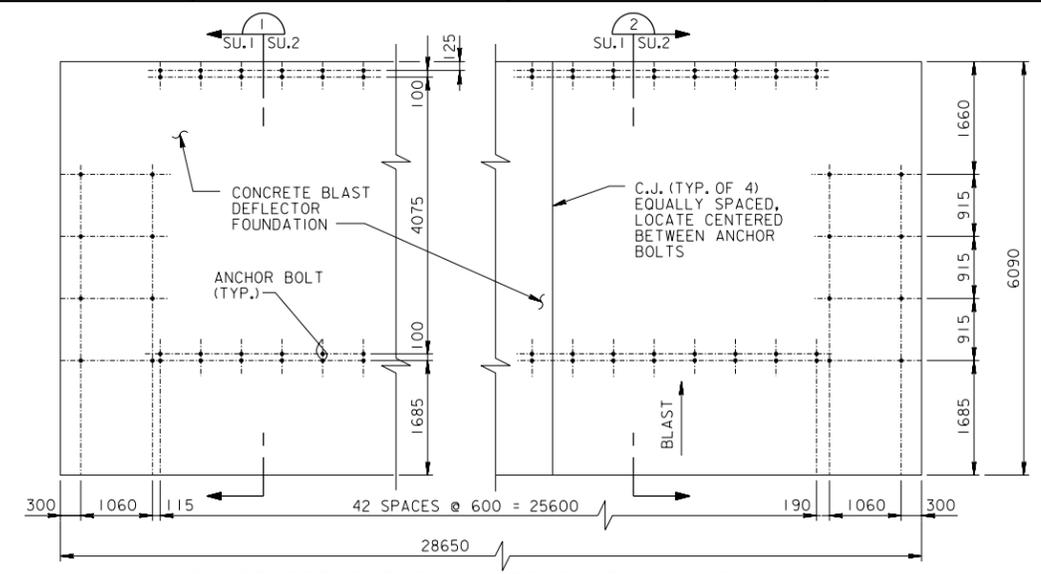

BLAST DEFLECTOR ANCHOR BOLT LAYOUT PLAN

0 1000 2000 mm
SCALE: 1:50

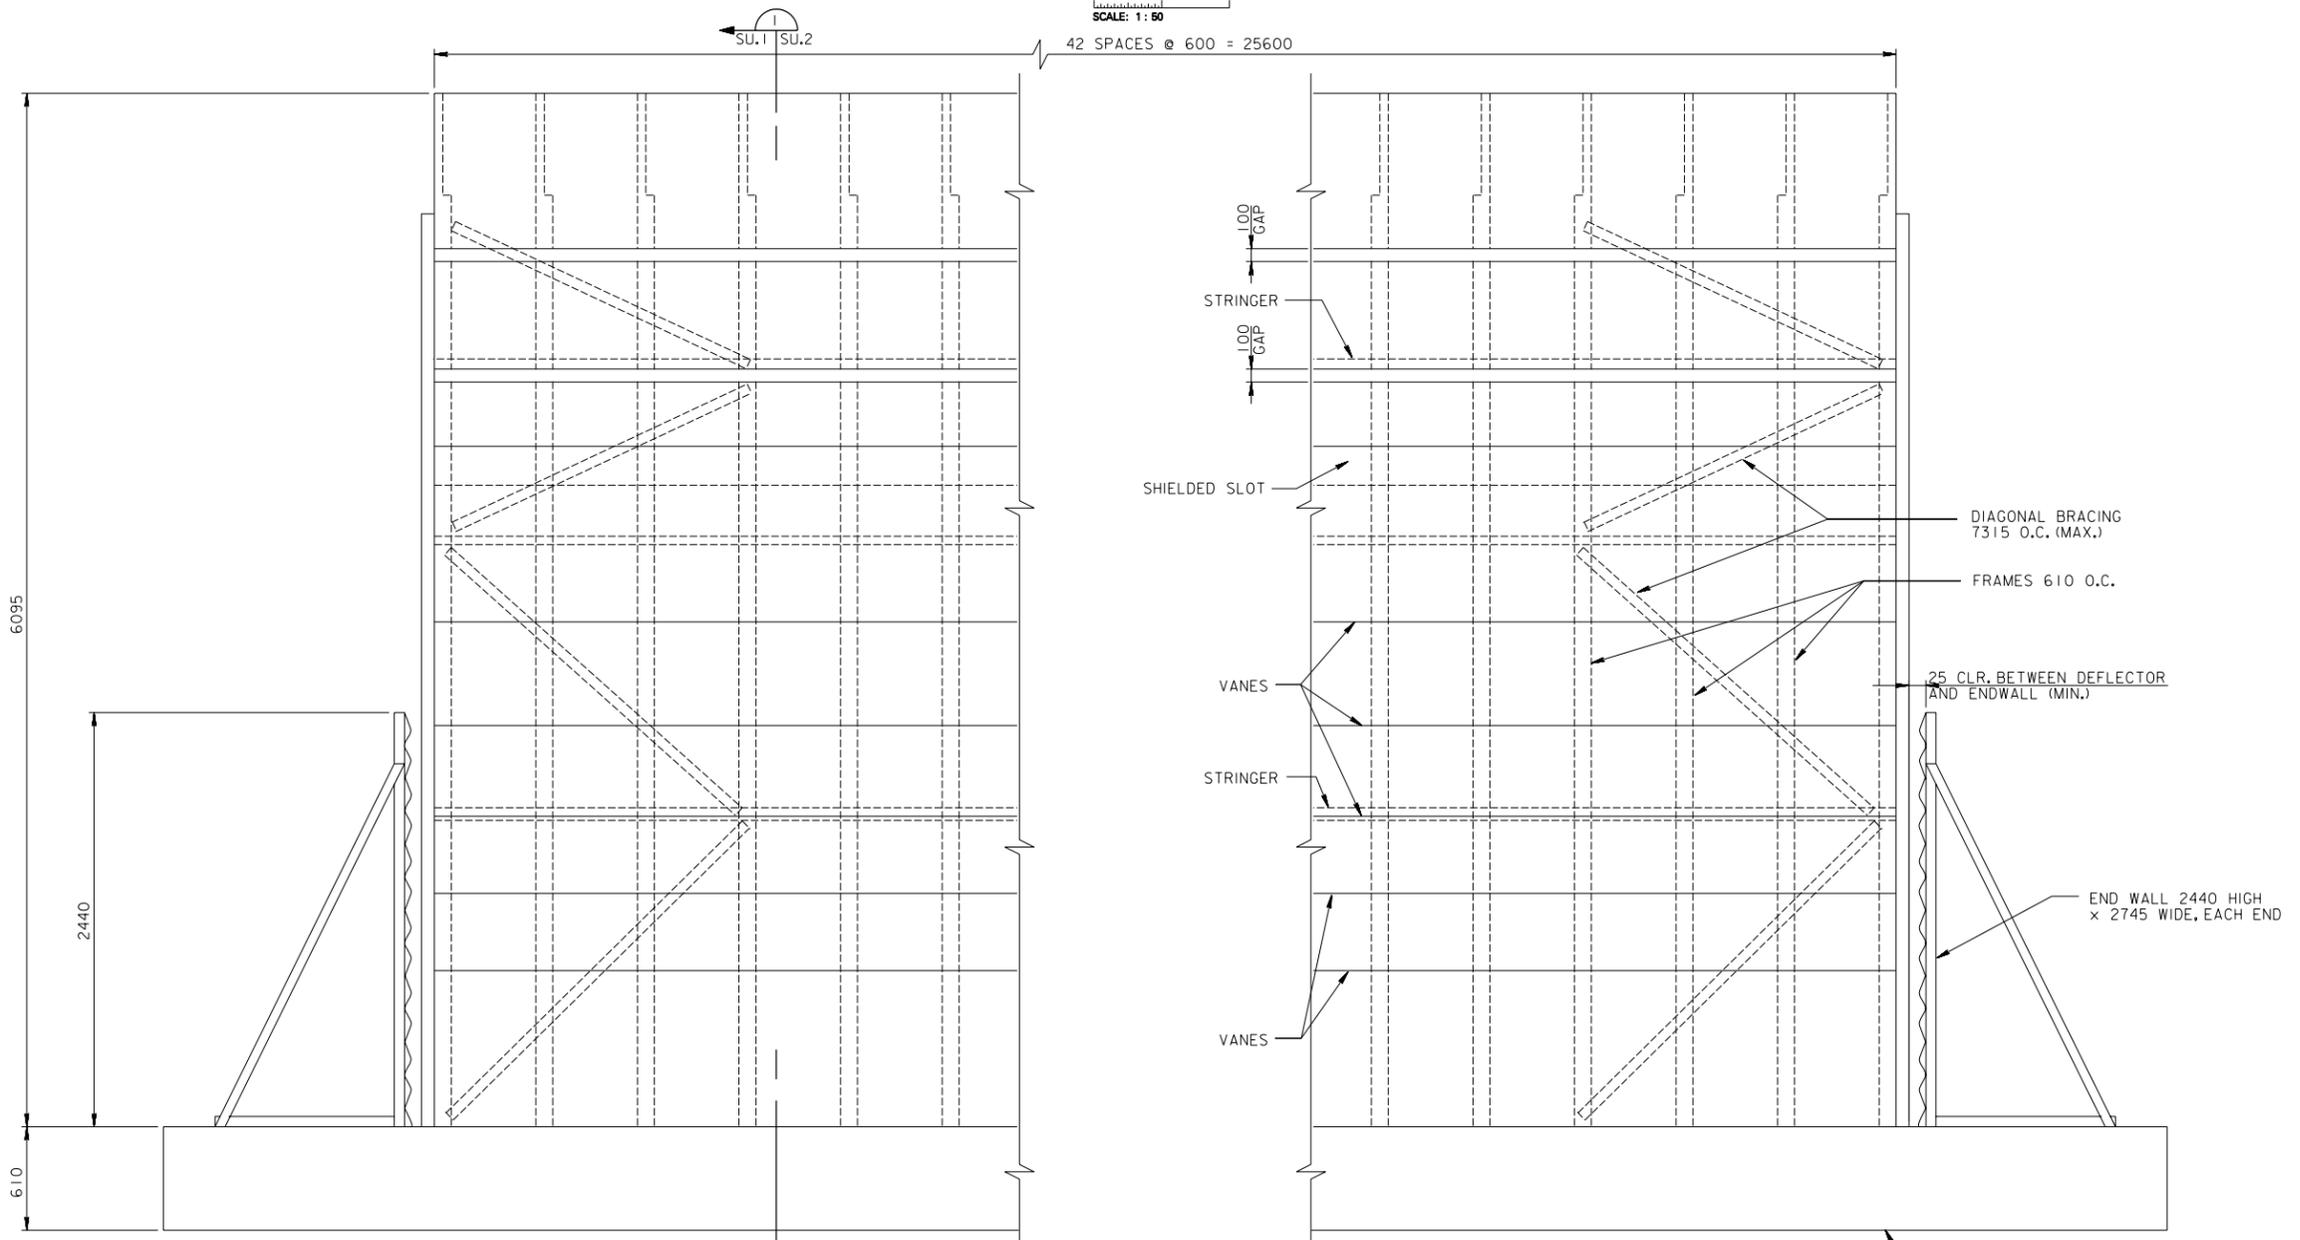

BLAST DEFLECTOR ELEVATION

0 200 400 600 800 mm
SCALE: 1:20

NOTE:
1. BLAST DEFLECTORS SHALL BE LYNNCO TYPE GS-20, AS MANUFACTURED BY BLAST DEFLECTORS INC. OR EQUAL.



Symbol	Description	Date	Approved


Designed by: D.F.M. 1402-221-4672	Date: MAY 2002	Design file name: EL485U01.DGN	Spec. No. DAC45 02-P-0009
Submitted by: x	Plot Scale Ratio: X 1 X	Contract No. AF 421-90-01	Drawing code: AF 421-90-01
Date: 			
Chief: STRUCTURAL/INTERIORS			

ALL SCALES SHOWN ARE BASED ON A STANDARD DRAWING SIZE OF 28" X 40" OR METRIC DRAWING SIZE OF 841mm X 594mm. IF ANY OTHER SIZE DRAWINGS ARE FURNISHED OR PLOTTED THE CONTRACTOR SHALL ADJUST THE SCALES ACCORDINGLY. THE CONTRACTOR SHALL ALSO ADVISE HIS SUB-CONTRACTORS OF THE ABOVE.


ELLISWORTH AFB
SOUTH DAKOTA
LIVE ORDNANCE LOADING AREA
**BLAST DEFLECTORS
ANCHOR BOLT LAYOUT PLAN
AND ELEVATION**

Sheet reference number:
SU.1


Seal

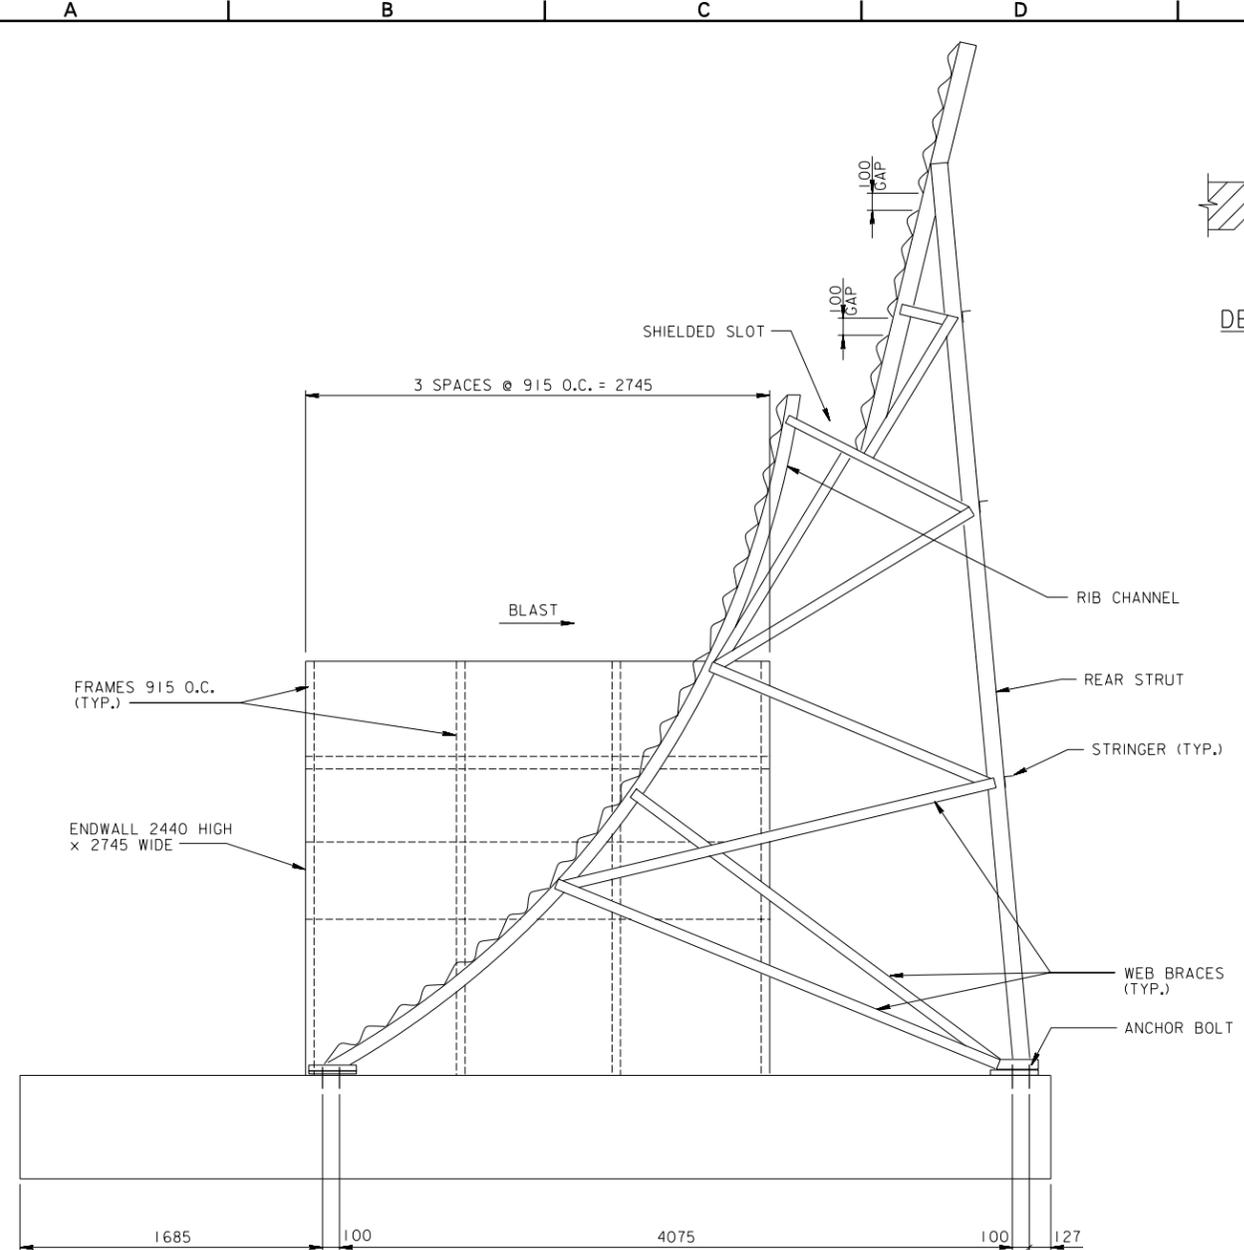


SECTION 1
SU.1/SU.2
SCALE: 1:20

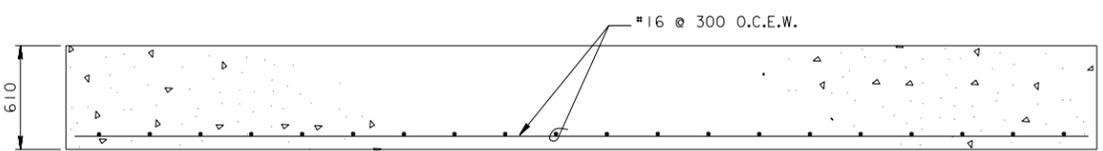

SECTION 2
SU.1/SU.2
SCALE: 1:20

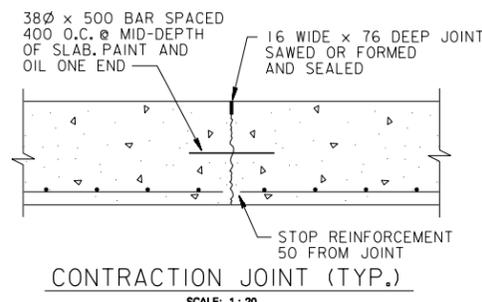

CONTRACTION JOINT (TYP.)
SCALE: 1:20

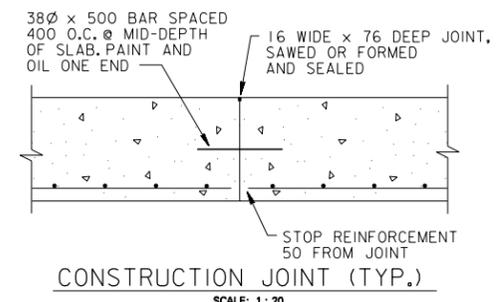

CONSTRUCTION JOINT (TYP.)
SCALE: 1:20


T.O.F. ELEV.
SEE GRADING
PLAN SHTS.

FUEL PIT NOTES:


- FUEL PIT DIMENSIONS SHALL BE AS STANDARD WITH THE MANUFACTURER AND NOT LESS THAN THOSE INDICATED, BUT EXCEEDING THE INDICATED DIMENSIONS ONLY BY THE AMOUNT OF THE CLOSEST STANDARD SIZE. ANY CHANGES TO THE REINFORCED CONCRETE REQUIRED TO MATCH THE CONFIGURATION OF THE SUPPLIED PITS SHALL BE PROVIDED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE GOVERNMENT AND SHALL BE SUBMITTED FOR APPROVAL.

MATERIAL NOTES:


- REINFORCED CONCRETE:
A. CONCRETE: SPECIFIED COMPRESSIVE STRENGTH $f'_c=4000$ PSI AT 28 DAYS FOR ALL WORK.
B. REINFORCING BARS: SPECIFIED YIELD STRENGTH $f_y=60$ ksi (GRADE 60).




DETAIL A

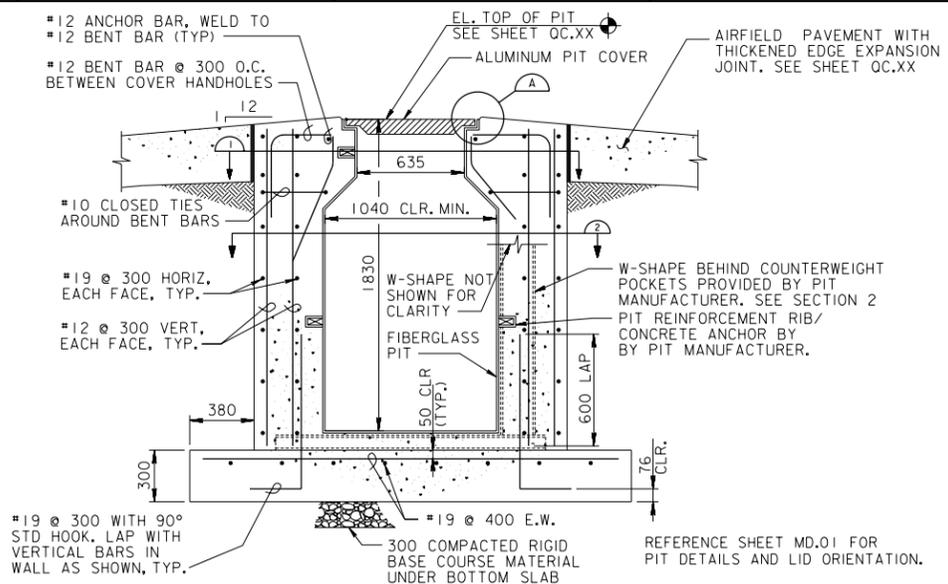

FUEL HYDRANT PIT SECTION
SCALE: 1:20

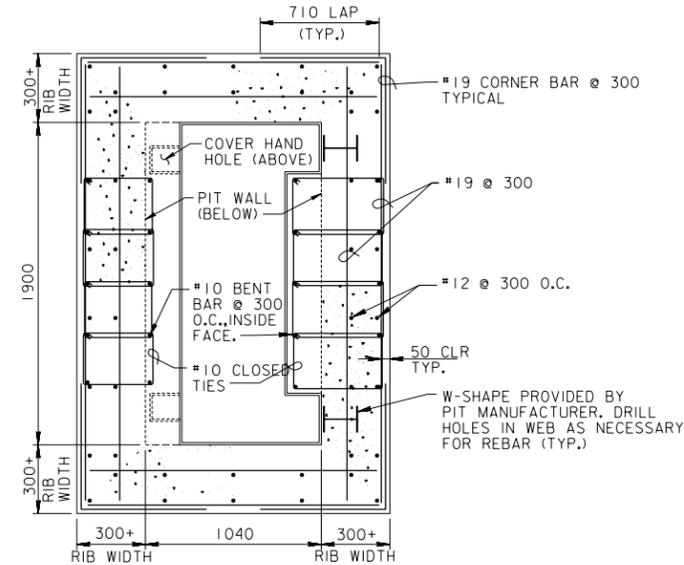

SECTION 1
SCALE: 1:20

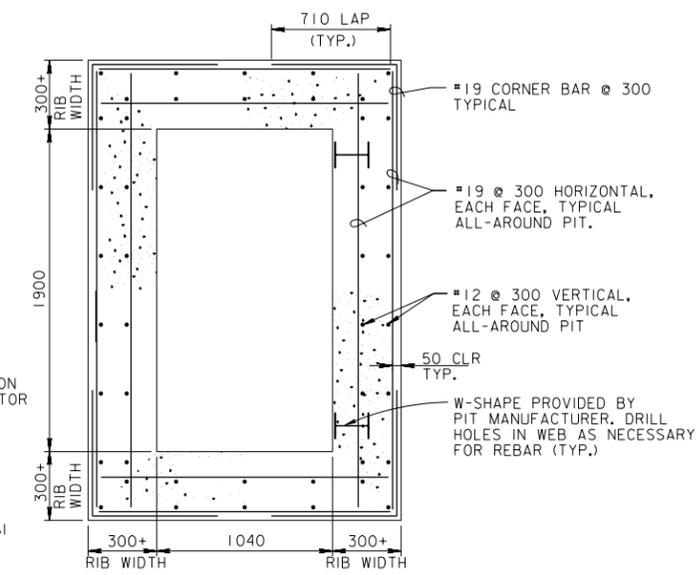

SECTION 2
SCALE: 1:20

ALL SCALES SHOWN ARE BASED ON A STANDARD DRAWING SIZE OF 28" X 40" OR METRIC DRAWING SIZE OF 841mm X 594mm. IF ANY OTHER SIZE DRAWINGS ARE FURNISHED OR PLOTTED THE CONTRACTOR SHALL ADJUST THE SCALES ACCORDINGLY. THE CONTRACTOR SHALL ALSO ADVISE HIS SUB-CONTRACTORS OF THE ABOVE.



Symbol	Description	Date	Approved

Designed by: D.F.M. 462-221-4672	Date: MAY 2002	Spec. No. DAC-45 02-P-0009	Contract No. DAC-45
Submitted by: x	Design file name EL48SU02.DGN	Plot Scale Ratio: X 1 X	Drawing code: AF 421-90-01
Date:	Chief: STRUCTURAL/INTERIORS		

ELLISWORTH AFB
SOUTH DAKOTA
LIVE ORDNANCE LOADING AREA
BLAST DEFLECTOR AND SECTIONS
ELEVATION AND SECTIONS
AND FUEL PIT SECTIONS

Sheet reference number:
SU.2

Seal